

TIGER Neo III

650-670 Watt

85 $\pm$ 5% Bifaciality

BIFACIAL MODULE



- IEC61215:2021 / IEC61730:2023
- IEC61701 / IEC62716 / IEC60068 / IEC62804
- ISO9001:2015: Quality Management System
- ISO14001:2015: Environment Management System
- ISO45001:2018: Occupational health and safety management systems

JKM650-670N-66QL6-BD\ -F2-EN

6-BDV 650-6

Characteristics

	N- type Mono-crystalline
	264 (66 × 4)
	2382 × 1134 × 30 mm
	32.5 kg
	2.0 mm, Anti-reflection Coating
	2.0 mm, Heat Strengthened Glass
	Anodized Aluminium Alloy
	IP68 Rated
	Class II
	Class C
	4.0 mm ²
	(+): 600 mm , (-): 400 mm or customized Length

Packaging Configuration

Pallet Dimension	2396 × 1110 × 1251 mm
Packing Description (Two pallets in one stack)	36 pcs/pallet, 72 pcs/stack, 720 pcs/ 40'HQ Container

Specifications (STC)

Maximum Power	Pmax [Wp]
Maximum Power Voltage	Vmp [V]
Maximum Power Current	Imp [A]
Open Circuit Voltage	Voc [V]
Short Circuit Current	Isc [A]


W

0 ~ +3 %

-0.26 %/°C

-0.26 %/°C

a	a7	a	a	at
a	t7	Wt		
a	a	aa	a	a
W	t	a	7	
aW	aWa	a7	W	Wa

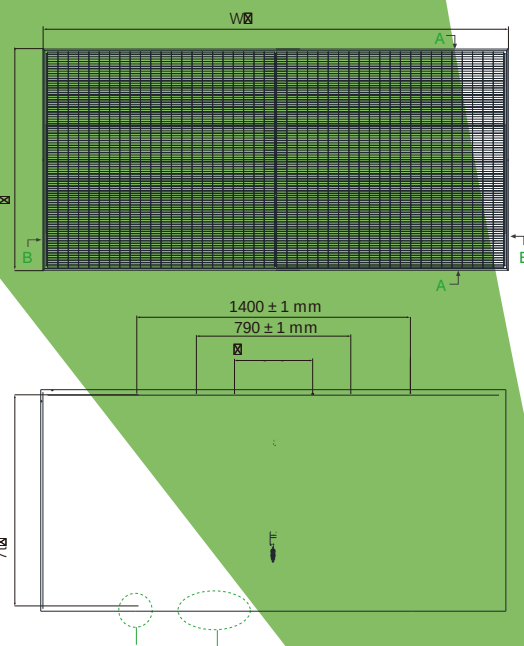

Electrical Performance

